


ART. 895#11B40

DN	D	K	B	H	N. holes	F	H2	H3	A	S	d1
10	90	60	16	14	4	2	35	6	17.2	2	40
15	95	65	16	14	4	2	38	6	21.3	2	45
20	105	75	18	14	4	2	40	6	26.9	2.3	58
25	115	85	18	14	4	2	40	6	33.7	2.6	68
32	140	100	18	18	4	2	42	6	42.4	2.6	78
40	150	110	18	18	4	3	45	7	48.3	2.6	88
50	165	125	20	18	4	3	48	8	60.3	2.9	102
65	185	145	22	18	8	3	52	10	76.1	2.9	122
80	200	160	24	18	8	3	58	12	88.9	3.2	138
100	235	190	24	22	8	3	65	12	114.3	3.6	162
125	270	220	26	26	8	3	68	12	139.7	4	188
150	300	250	28	26	8	3	75	12	168.3	4.5	218
200	375	320	34	30	12	3	88	16	219.1	6.3	285
250	450	385	38	33	12	3	105	18	273	7.1	345
300	515	450	42	33	16	4	115	18	323.9	8	410
350	580	510	46	36	16	4	125	20	355.6	8.8	465
400	660	585	50	39	16	4	135	20	406.4	11	535
450	685	610	57	39	20	4	135	20	457	12.5	560
500	755	670	57	42	20	4	140	20	508	14.2	615
600	890	795	72	48	20	5	150	20	610	16	735

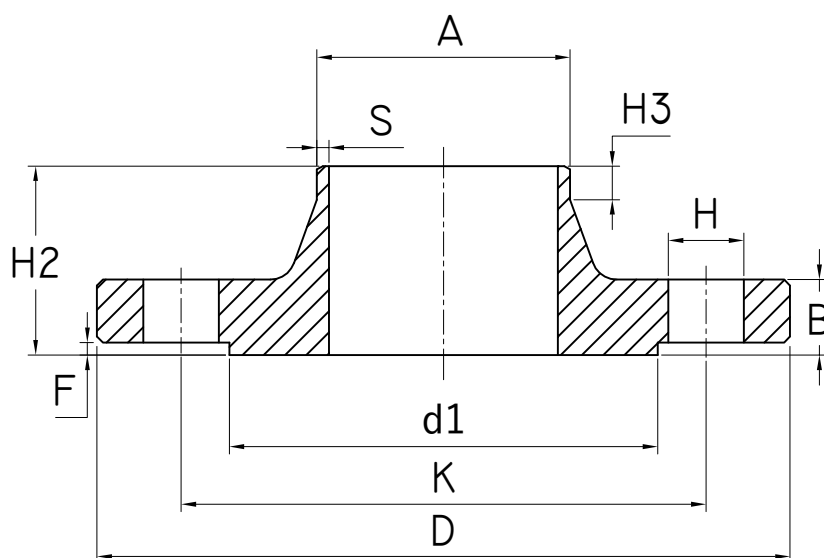

FLANGIA ASTM A182 EN 1092-1 11B PN 40
FLANGE ASTM A182 EN 1092-1 11B PN 40

TECNICATRE
Stainless Steel Experience