


ART. 930

INCH1	INCH2	D	D1	H	WALL THICKNESS		
					SCH 10S	SCH 40S	SCH 80S
3/4"	1/2"	26.7	21.3	38	2,11-2,11	2,87-2,77	3,91-3,73
3/4"	3/8"	26.7	17.3	38	2,11-1,65	2,87-2,31	3,91-3,2
1"	3/4"	33.4	26.7	51	2,77-2,11	3,38-2,87	4,55-3,91
1"	1/2"	33.4	21.3	51	2,77-2,11	3,38-2,77	4,55-3,73
1" 1/4	1"	42.2	33.4	51	2,77-2,77	3,56-3,38	4,85-4,55
1" 1/4	3/4"	42.2	26.7	51	2,77-2,11	3,56-2,87	4,85-3,91
1" 1/4	1/2"	42.2	21.3	51	2,77-2,11	3,56-2,77	4,85-3,73
1" 1/2	1" 1/4	48.3	42.2	64	2,77-2,77	3,68-3,56	5,08-4,85
1" 1/2	1"	48.3	33.4	64	2,77-2,77	3,68-3,38	5,08-4,55
1" 1/2	3/4"	48.3	26.7	64	2,77-2,11	3,68-2,87	5,08-3,91
1" 1/2	1/2"	48.3	21.3	64	2,77-2,11	3,68-2,77	5,08-3,73
2"	1" 1/2	60.3	48.3	76	2,77-2,77	3,91-3,68	5,54-5,08
2"	1" 1/4	60.3	42.2	76	2,77-2,77	3,91-3,56	5,54-4,85
2"	1"	60.3	33.4	76	2,77-2,77	3,91-3,38	5,54-4,55
2"	3/4"	60.3	26.7	76	2,77-2,11	3,91-2,87	5,54-3,91
2" 1/2	2"	73	60.3	89	3,05-2,77	5,16-3,91	7,01-5,54
2" 1/2	1" 1/2	73	48.3	89	3,05-2,77	5,16-3,68	7,01-5,08
2" 1/2	1" 1/4	73	42.2	89	3,05-2,77	5,16-3,56	7,01-4,85
2" 1/2	1"	73	33.4	89	3,05-2,77	5,16-3,38	7,01-4,55
3"	2" 1/2	88.9	73	89	3,05-3,05	5,49-5,16	7,62-7,01
3"	2"	88.9	60.3	89	3,05-2,77	5,49-3,91	7,62-5,54
3"	1" 1/2	88.9	48.3	89	3,05-2,77	5,49-3,68	7,62-5,08
3"	1" 1/4	88.9	42.2	89	3,05-2,77	5,49-3,56	7,62-4,85
3" 1/2	3"	101.6	88.9	102	3,05-3,05	5,74-5,49	8,08-7,62
3" 1/2	2" 1/2	101.6	73	102	3,05-3,05	5,74-5,16	8,08-7,01
3" 1/2	2"	101.6	60.3	102	3,05-2,77	5,74-3,91	8,08-5,54
3" 1/2	1" 1/2	101.6	48.3	102	3,05-2,77	5,74-3,68	8,08-5,08
3" 1/2	1" 1/4	101.6	42.2	102	3,05-2,77	5,74-3,56	8,08-4,85
4"	3" 1/2	114.3	101.6	102	3,05-3,05	6,02-5,74	8,56-8,08
4"	3"	114.3	88.9	102	3,05-3,05	6,02-5,49	8,56-7,62
4"	2" 1/2	114.3	73	102	3,05-3,05	6,02-5,16	8,56-7,01
4"	2"	114.3	60.3	102	3,05-2,77	6,02-3,91	8,56-5,54
4"	1" 1/2	114.3	48.3	102	3,05-2,77	6,02-3,68	8,56-5,08
5"	4"	141.3	114.3	127	3,4-3,05	6,55-6,02	9,53-8,56
5"	3" 1/2	141.3	101.6	127	3,4-3,05	6,55-5,74	9,53-8,08
5"	3"	141.3	88.9	127	3,4-3,05	6,55-5,49	9,53-7,62
5"	2" 1/2	141.3	73	127	3,4-3,05	6,55-5,16	9,53-7,01
5"	2"	141.3	60.3	127	3,4-2,77	6,55-3,91	9,53-5,54
6"	5"	168.3	141.3	140	3,4-3,4	7,11-6,55	10,97-9,53
6"	4"	168.3	114.3	140	3,4-3,05	7,11-6,02	10,97-8,56
6"	3" 1/2	168.3	101.6	140	3,4-3,05	7,11-5,74	10,97-8,08
6"	3"	168.3	88.9	140	3,4-3,05	7,11-5,49	10,97-7,62
6"	2" 1/2	168.3	73	140	3,4-3,05	7,11-5,16	10,97-7,01
8"	6"	219.1	168.3	152	3,76-3,4	8,18-7,11	12,7-10,79
8"	5"	219.1	141.3	152	3,76-3,4	8,18-6,55	12,7-9,53
8"	4"	219.1	114.3	152	3,76-3,05	8,18-6,02	12,7-8,56
8"	3" 1/2	219.1	101.6	152	3,76-3,05	8,18-5,71	12,7-8,08

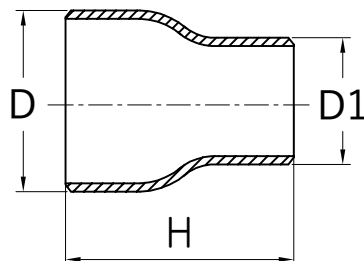

RIDUZIONE CONCENTRICA ANSI B16.9 SMLS
SEAMLESS CONCENTRIC REDUCER ANSI B16.9

TECNICATRE
 Stainless Steel Experience